


ADVR-440

Generator Automatic Voltage Regulator Operation Manual

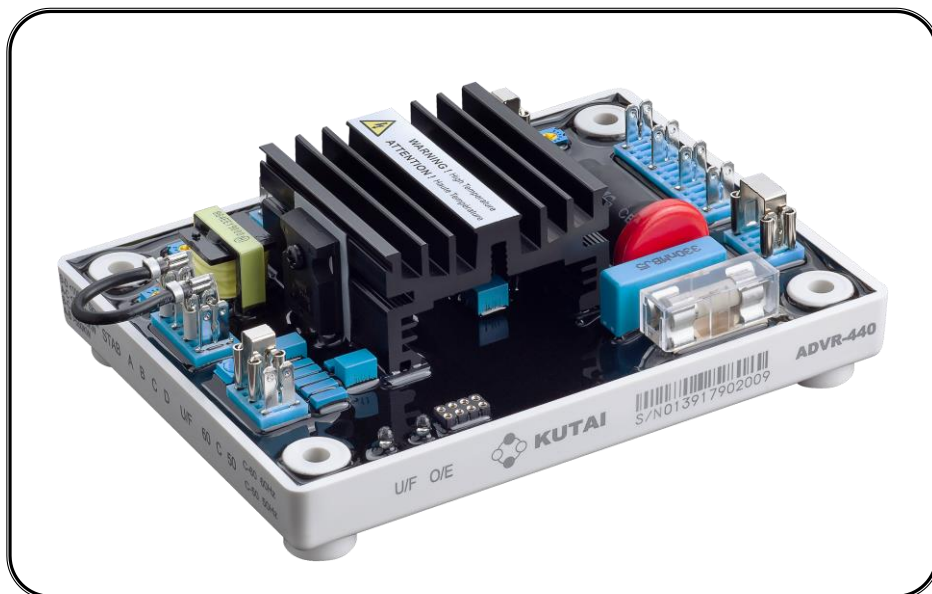

Analog / Digital, Single-phase detection · Excitation Current 4 Amps.
For use in brushless, self-excited (shunt) generators
Compatible with Stamford AS440*, AVR

* All manufacturer names and numbers are used for reference purpose only
and do not imply that any part is the product of these manufacturer.



KUTAI ELECTRONICS INDUSTRY CO., LTD.

TEL : +886-7-8121771

FAX : +886-7-8121775

Website : www.kutai.com.tw

Headquarters : No.3, Ln. 201, Qianfu St., Qianzhen Dist., Kaohsiung City 80664, Taiwan



SECTION 1 : SPECIFICATION

Sensing Input (7, 8) Average Reading

Voltage	110 / 220 Vac, 1 phase 2 wire
Jumper setting	90 – 130 Vac @ 110 Vac 180 – 260 Vac @ 220 Vac
Frequency	50/60 Hz (Jumper setting)

Power Input (7, Z2)

Voltage	40 – 300 Vac, 1 phase 2 wire
Frequency	40 – 60 Hz

Excitation Output (F1, F2)

110V 1 phase Continuous	33 Vdc	4A
	Max. 45 Vdc	7.5A for 10 secs.
220V 1 phase Continuous	63 Vdc	4A
	Max. 90 Vdc	7.5A for 10 secs.
Resistance	Min. 15 ohms, Max.100 ohms	
Fuse Spec.	Slow blow 5 x 20mm S505-6.3A	

External Voltage Adjustment (1, 2)

Max.+/- 10% @ 1 K ohm 1 watt potentiometer

Voltage Regulation

Less than +/- 0.5% (with 4% engine governing)

Build Up Voltage

5 Vac 25 Hz residual volts at power input terminal

Soft Start Ramp Time

4 seconds +/- 10%

Typical System Response

Less than 20 milliseconds

EMI Suppression

Internal electromagnetic interference filtering

Static Power Dissipation

Max. 4 watts

Quadrature Droop Input (S1, S2)

Burden	Less than 0.1 ohm
Max. sensitivity	0.07A for 5% droop (PF=0)
	Droop adjustable
Max. input	0.33A

Analogue Voltage Input (A1, A2)

Input resistance	More than 2K ohm
Max. input	+/- 5 Vdc or +10 Vdc
Sensitivity	1Vdc for 5% Generator Volts
	TRIM adjustable

Under Frequency Protection (Factory Presets)

50 Hz system knee point	at 45 Hz
60 Hz system knee point	at 55 Hz

Over Excitation Protection

Set point 40 – 110 Vdc @ power input 220 Vac
EXT. adjustable
Set point 110 Vdc +/- 10% @ power input 220 Vac
(Factory Presets)
The output will drop after a 10 seconds delay

Voltage Thermal Drift

Less than 3% at temperature range -40 to +70 °C

Under Frequency Knee Point Thermal Drift

Less than +/- 0.1 Hz at -40 to +70 °C

Environment

Operating Temperature	-40 to +60 °C
Storage Temperature	-40 to +85 °C
Relative Humidity	Max. 95%
Vibration	5.5 Gs @ 60 Hz


Dimensions

135.0 (L) x 100.0 (W) x 45.0 (H) mm
5.31 (L) x 3.94 (W) x 1.77 (H) inch


Weight

405 g +/- 2%
0.89 lb +/- 2%

SECTION 2 : APPEARANCE / DIMENSIONS / INSTALLATION DRAWING

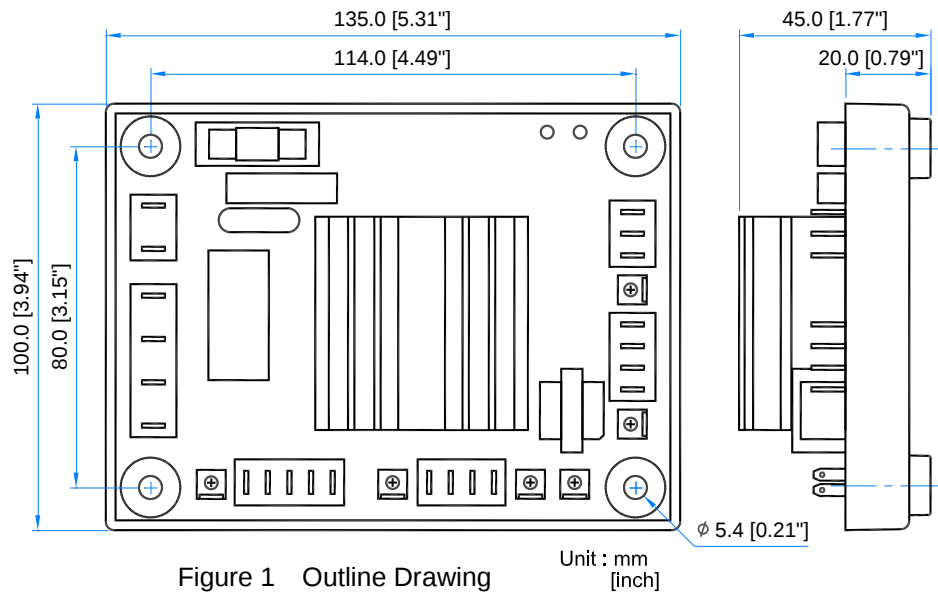

SECTION 3 : POTENTIOMETER ADJUSTMENT

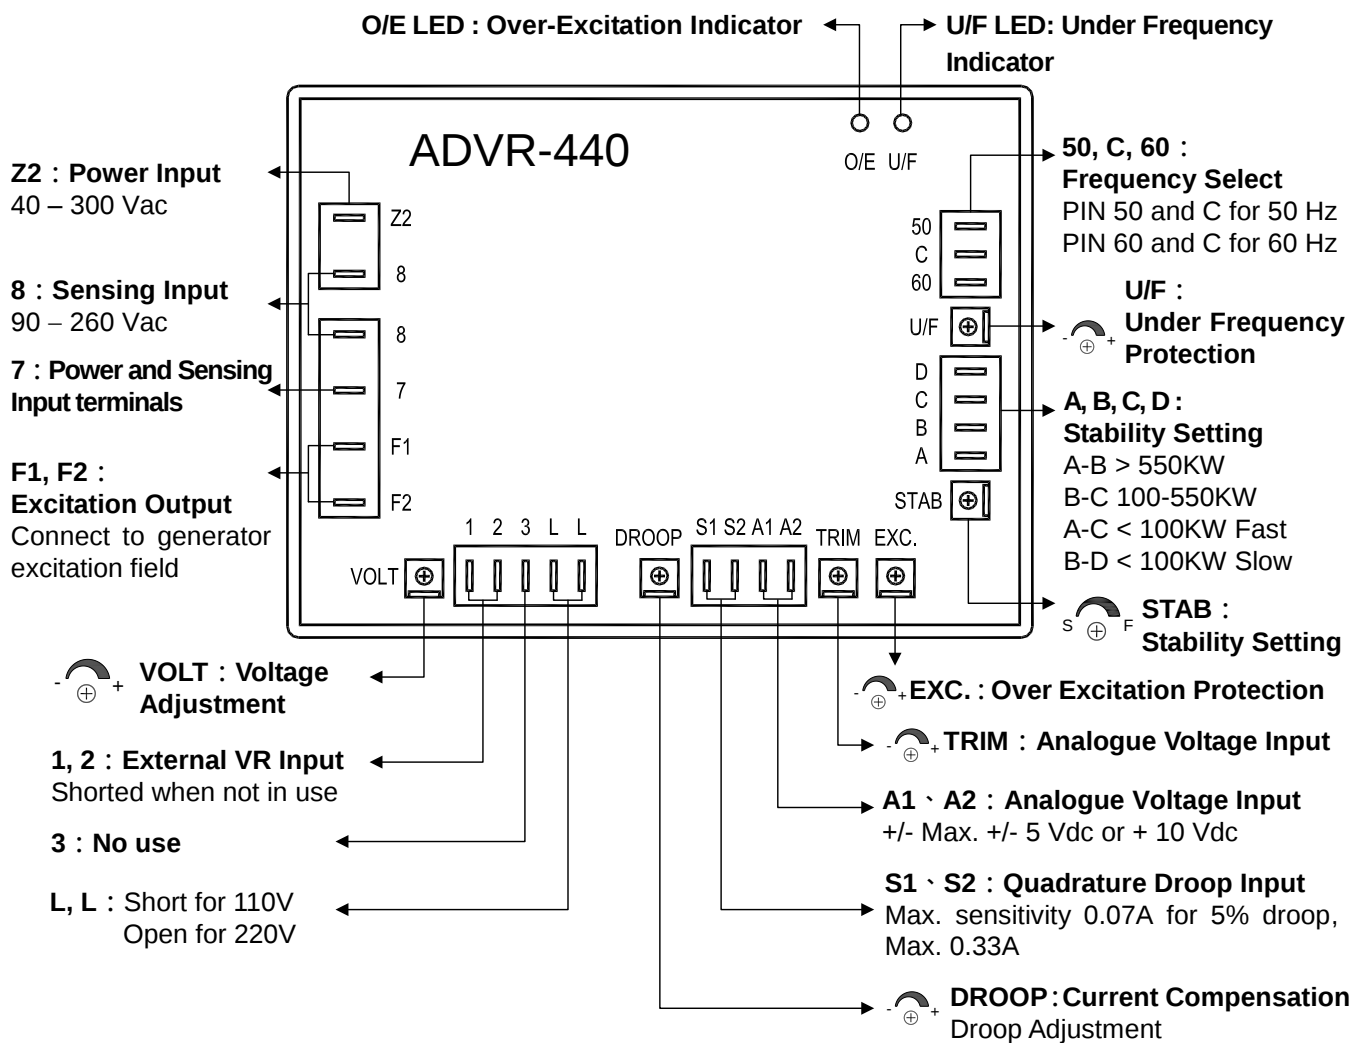

SECTION 4 : CONNECTION DIAGRAMS

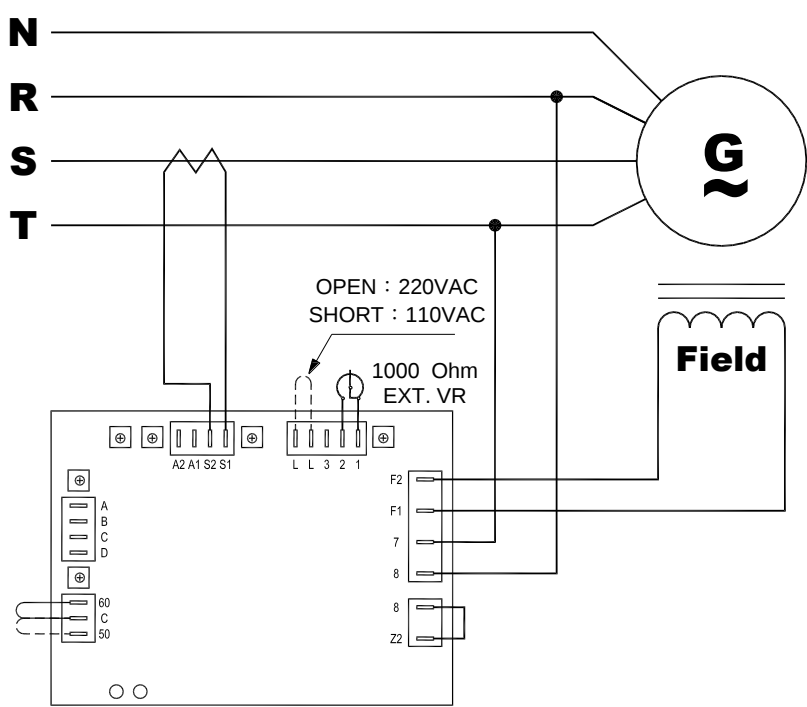


Figure 3 110/220 Vac

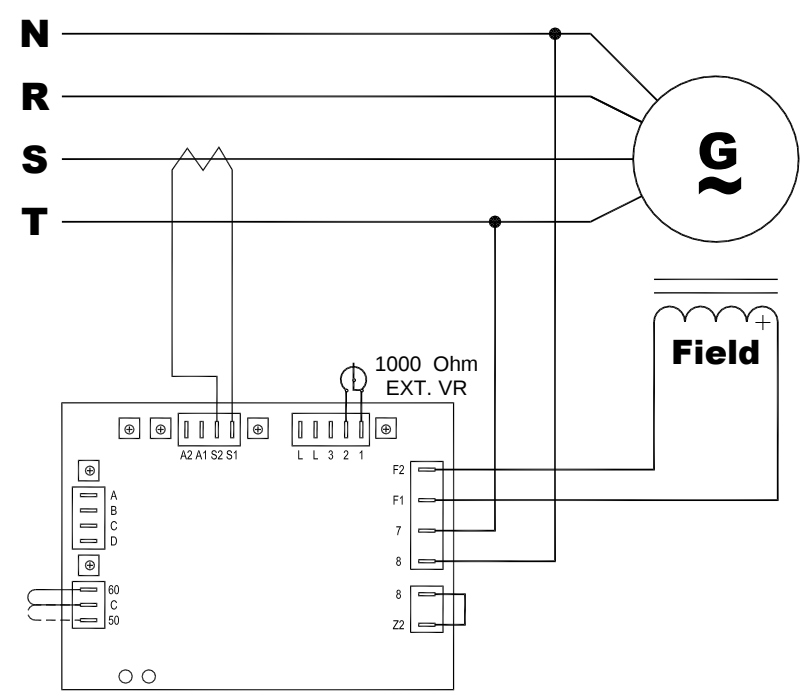


Figure 4 380/440 Vac

